

The following instructions are for launching a TelVue InfoVue system including configuring the InfoVue Standard Player, InfoVue Pro Player (capture card models), and the InfoVue Stick Player.

SET UP THE INFOVUE STANDARD OR PRO PLAYER

Install in a Rack

To install the InfoVue Standard or Pro Player in a rack, use the ears to bolt the server in place.

Power Up

Power up the InfoVue Player.

Log In & Configure Networking

There are two ways to configure networking:


- a. WEB UI requires ethernet cable, and an additional computer.
 - i. Assign IP address values to a network port on your computer:
 - 1. IP 192.168.0.101
 - 2. Net Mask: 255.255.255.0
 - ii. Connect ethernet cable between your computer and the eth1 port on InfoVue.
 - iii. Access the Web UI from a web browser, using the URL: http://192.168.0.242. (This is the factory-assigned IP address for the InfoVue Player.)
 - iv. Login with the default Username: admin and Password: admin
 - v. Set the IP Address and Configure Networking via the Config -> Network page.
- b. DESKTOP CONSOLE requires keyboard & mouse, and HDMI monitor.
 - i. Plug the InfoVue Player Display HDMI Output (#3) into a Monitor or TV.

- ii. Attach USB keyboard & mouse
 - 1. Press Ctrl+Alt+Del to bring up the Windows login window.
 - 2. Log off the existing login.
 - 3. Log in as user "config" with password "config".
- iii. Assign static IP to eth0 Management.
 - 1. Double click the desktop icon "Network":
 - a. Choose "Change adapter settings" (left side)
 - b. Double click on eth0 Management.
 - c. Select Properties.
 - d. Choose Internet Protocol Version 4 (TCP/IPv4).
 - e. Click the properties button.
 - f. Choose "Use the following IP address" and fill in your network specific values.
- iv. Once IP configuration is completed, double click the Restart InfoVue Player icon on the desktop to reboot the InfoVue Player.
- v. Now you can access the Web UI from a web browser. Login to the InfoVue Web User Interface at: http://(your IP address from previous step) with the default Username: admin and Password: admin

Refer to the online user instructions on how to use the Web UI for other configuration and encoder streaming settings. http://telvue.com/knowledgebase/infovue-pro-configuration-ui/

Configure InfoVue Pro for Encoding (IP Output)

Plug the InfoVue Pro Player Display HDMI Output (#3) into the HDMI Input (#12) with provided HDMI cable. Set up encoding from the Web UI. Note this applies to InfoVue Pro Players only, InfoVue Standard Players do not support Encoding.

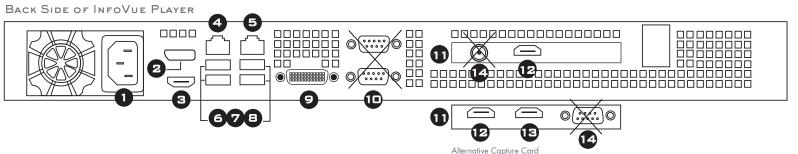

- I. Power
- 2. DISPLAY PORT (DP)
- 3. DISPLAY HDMI OUT
- 4. ETHERNET [O]
- 5. Ethernet [1]
- 6. Mouse
- 7. KEYBOARD
- 8. USB
- 9. DVI
- 10. SERIAL PORTS (NOT USED)
- II. CAPTURE CARD (PRO-ONLY)
- 12. HDMI INPUT
- 13. Monitor HDMI Out (pass-through input)
- 14. (NOT USED)

Turn the page for additional steps.





16000 Horizon Way Suite 100 Mount Laurel, NJ 08054 800.885.8886

EMAIL: SUPPORT@TELVUE.COM
ONLINE RESOURCES: WWW.TELVUE.COM/INFOVUE

HDMI Out

USB Mouse

(Plugs into an

HDMI monitor)

TELVUE INFOVUE™

STICK



SET UP THE INFOVUE STICK

The InfoVue Stick is a miniature InfoVue player with WiFi that can be used to display your InfoVue signage on a single HDMI TV or monitor. A USB Ethernet adapter is available if WiFi cannot be used.

Requirements

- a. Monitor with HDMI input (not included)
- b. USB mouse and keyboard (not included)
- c. USB hub (optional)
- d. WiFi Network Access (wired network accpetable)

2 Install the InfoVue Stick

- a. Connect Stick HDMI port to monitor. HDMI extension cable is provided if needed.
- b. Connect power to Stick using provided power adapter plugged into the micro USB port on the Stick.

Configure the InfoVue Stick

- a. Connect USB keyboard and mouse to Stick. You should see the InfoVue "Channel Loading" screen.
- b. To recognize your WiFi:
 - i. Press Ctl+Alt+Del
- Choose Sign Out (Note: Click on the words "Sign Out". Do not click the arrow, which only cancels.) You'll see a blank InfoVue screen.
- iii. Hit any key to see the following three login options: config, infovue, teveadmin. Click on the config icon on the left. Login using password: config.



- iv. On the desktop double click the icon labeled "WiFi". A bar will slide out from the right side of the screen displaying available wireless networks.
- v. Click on your desired wireless network.





- vi. Check "Connect automatically" and click "Connect". It will ask for a network security key. Enter your key and click Next. When it asks if you want to connect to other devices, Click "NO".
- vii. Now it should say "Connected" under your chosen network.

 (If you want to delete a connection from the list, right-click on the network name and and choose "forget this network".)



16000 HORIZON WAY SUITE 100 MOUNT LAUREL, NJ 08054 800.885.8886

4 Reboot the System

To get back to the InfoVue Player, Reboot the system.

• Double click on the Restart InfoVue Player icon on the desktop.

Creating Content (For All InfoVue Player Types)

Your InfoVue Player is now ready to receive content. To create content, login to the InfoVue management interface (https://infovue.telvue.com) from any Internet connected computer with the login credentials that were provided to you.

Login:	
Password:	
English	· V
Connection	
Forgot Password?	

ADDITIONAL RESOURCES

For more detailed instructions on using the InfoVue Digital Signage system, please refer to our online knowledgebase at: http://telvue.com/kb/infovue/ to view the InfoVue User Manual, Beginner's Guide, and FAQs.

EMAIL: SUPPORT@TELVUE.COM

ONLINE RESOURCES: www.TELVUE.COM/INFOVUE